

Erratum: Structural and Electrochemical Evidence of Layered to Spinel Phase Transformation of Li and Mn Rich Layered Cathode Materials of the Formulae $x\text{Li}[\text{Li}_{1/3}\text{Mn}_{2/3}]\text{O}_2 \cdot (1-x)\text{LiMn}_{1/3}\text{Ni}_{1/3}\text{Co}_{1/3}\text{O}_2$ ($x = 0.2, 0.4, 0.6$) upon Cycling [*J. Electrochem. Soc.*, 161, A1534 (2014)]

To cite this article: Prasant Kumar Nayak *et al* 2014 *J. Electrochem. Soc.* **161** X23

View the [article online](#) for updates and enhancements.

You may also like

- [Structure of Brightest Cluster Galaxies and Intracluster Light](#)
M. Kluge, B. Neureiter, A. Riffeser et al.
- [Effect of Lithium Bis\(oxalato\) Borate \(LiBOB\) As an Additive in Electrolyte for Enhanced Cycling Stability of Li-Rich \$\text{Li}_{1-x}\text{Ni}_{1/3}\text{Mn}_{2/3}\text{Co}_{1/3}\text{O}_2\$ cathodes](#)
Doron Aurbach, Prasant Nayak, Judith Grinblat et al.
- [Power exhaust and detachment with varying outer leg length using turbulence simulations and experiments designed for validation](#)
Davide Mancini, Diego Sales de Oliveira, Paolo Ricci et al.


The New PAT-Cell-Solid!

Cycle Solid-State Batteries Under Controlled Pressure of up to 300 MPa (6 mm Diameter)!



- ✓ **Adjust and measure a force of up to 9000 N on the cell stack!**
Force adjustment possible throughout the entire experiment
- ✓ **Built-in force, and temperature sensors!**
With optional gas pressure sensor and gas in- and outlet
- ✓ **PAT-Solid-Core for easy assembly and reproducible results!**
Press and cycle solid-state batteries with 6 or 10 mm electrode diameter
- ✓ **Cableless and highly sealed battery test cell!**
For precise long-term measurements of solid-state cell chemistries

EL-CELL®
electrochemical test equipment

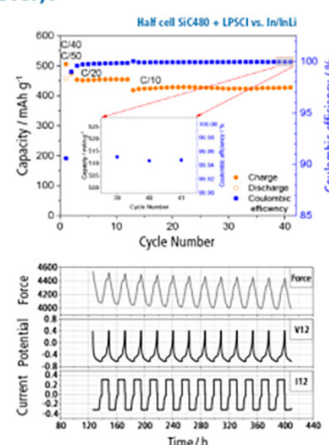

Learn more on our product website:



Download the data sheet (PDF):



Or contact us directly:

+49 40 79012-734

sales@el-cell.com

www.el-cell.com



**Erratum: Structural and Electrochemical Evidence
of Layered to Spinel Phase Transformation of Li and Mn
Rich Layered Cathode Materials of the Formulae
 $x\text{Li}[\text{Li}_{1/3}\text{Mn}_{2/3}]\text{O}_2 \cdot (1-x)\text{LiMn}_{1/3}\text{Ni}_{1/3}\text{Co}_{1/3}\text{O}_2$ ($x = 0.2, 0.4, 0.6$)
upon Cycling [*J. Electrochem. Soc.*, **161**, A1534 (2014)]**

**Prasant Kumar Nayak,^a Judith Grinblat,^a Mikhael Levi,^a Boris Markovsky,^a Yan Wu,^b
Bob Powell,^b and Doron Aurbach^a**

^aDepartment of Chemistry, Bar-Ilan University, Ramat-Gan, Israel 52900

^bBattery Systems Lab Group, Chemical & Materials Systems Laboratory, General Motors Global Research
and Development Center, Warren, Michigan 48090-9055, USA

© 2014 The Electrochemical Society. [DOI: [10.1149/2.0151414jes](https://doi.org/10.1149/2.0151414jes)] All rights reserved. Published September 23, 2014.

The authors and affiliations for this article are corrected as above.